

Call [800.959.0299](tel:800.959.0299) to speak with a sales representative
or visit us on the web at www.analyticaltechnology.com

Combustible Gas Detector


Model A12-17 LEL Transmitter



Gas Sensor / Generator Assembly

*Reliable Performance,
Unmatched Security.*



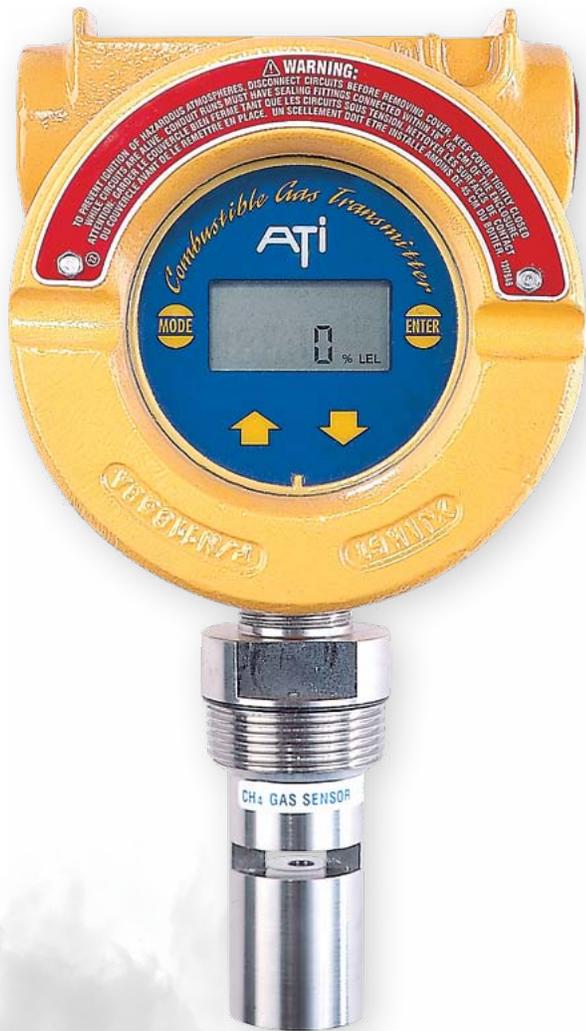

*Now Sensor Response
Can Be Verified Every
24 Hours Automatically.*

INTRODUCTION.

Combustible Gas Detectors are used in a wide variety of industrial plants to detect gas leakage or buildup before it reaches explosive levels. These detectors rely on thermal oxidation of any combustible gas or vapor on the surface of a heated catalyst. In other words, they simply burn the gas and measure the heat released in the combustion process. While this type of sensor is generally stable and reliable, it is also subject to poisoning by silicon vapor, lead compounds, and other environmental contaminants. To detect loss of sensitivity, most users test combustible sensors either weekly or biweekly to ensure response. The procedure is simple, but requires manpower to perform the test.

ATI's Auto-Test Combustible Gas Transmitter eliminates the need for frequent response checks. This transmitter performs an automatic gas test on the sensing element every 24 hours. The result is a combustible gas detector system with a level of reliability beyond that of any other system available. This daily sensor response verification is as close to a fail-safe detection system as you can find, with the added benefit of greatly reduced manual testing.

Combustible Gas Detection just got Safer...

FEATURES.

Integral Display. Transmitters contain an LCD display indicating LEL values locally.

Non-intrusive Calibration. Magnetic transmitter controls allow adjustments without removing enclosure cover.

Manual Auto-Test. The hydrogen generator may be activated manually on command to observe sensor response, if desired.

Auto-Test Log. The result of each Auto-Test is logged in transmitter memory. Operators may review the number of passes and fails from the LCD.

Signal Simulation. The 4-20 mA output from the transmitter may be manually set to 3, 4, 12, or 20 mA in order to test external alarm devices.

Plug-in Design. Electronic transmitters are modular, plugging into a standard relay base for ease of service.

Dual Condulet Option. Where installations require the sensor be located remote from transmitter electronics, sensors may be supplied with an explosion-proof junction box and a remote gas feed system to facilitate calibration.

AUTO-TEST SYSTEM OPERATION.

Combustible gas sensors are made up of two matched sensing elements, one active and one passive. Both are electrically heated and form two legs of a Wheatstone bridge circuit. When combustible gas contacts the sensor, the active element catalyzes the oxidation of gas, heating the active element and changing its resistance. The passive element remains unchanged, resulting in a change in the bridge circuit that is proportional to the gas concentration. As long as the active element remains in good condition, the sensor will respond rapidly to the presence of combustible gas.


The Auto-Test sensor is actually a combination of a gas sensor and an electrochemical hydrogen gas generator integrated into an explosion-proof stainless steel housing. When activated by the electronic transmitter, the generator produces hydrogen that diffuses to the gas sensor through the flame arrestor protecting the sensor. If the sensor responds properly, the transmitter will show a "Pass" indication. Should the sensor not respond properly, an "Auto Test Fail" message will activate at the transmitter and the 4-20 mA output from the transmitter will drop to 3 mA, providing for remote fault indication.



Plug-in Transmitter



Gas Sensor / Generator Assembly

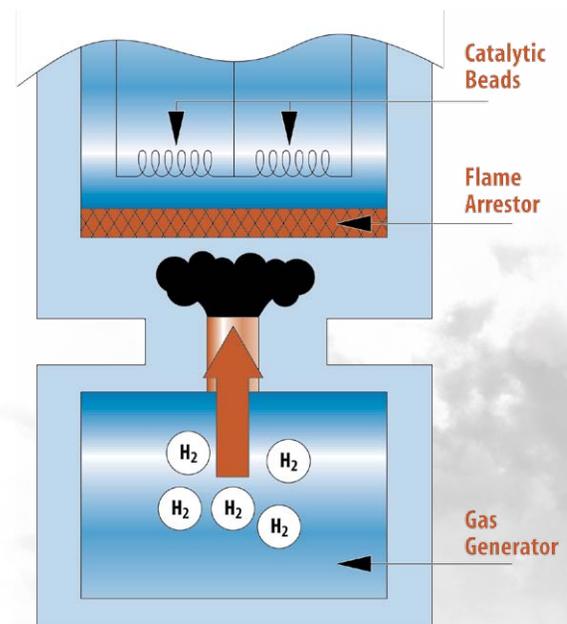

A12-17 LEL Transmitter SPECIFICATIONS

TRANSMITTER

Gas Type	Calibrated for methane unless otherwise specified
Range	0-100% LEL
Response Time (T90)	10 seconds
Accuracy	Generally +5% of value, but limited by available calibration gas accuracy.
Electronic Repeatability	±1%
Electronic Linearity	±0.5%
Zero Drift	Less than 2% full scale per month
Span Drift	Less than 3% per month
Output	Powered 4-20 mA, 1000 ohms max at 24 VDC
Power	12-30 VDC, 125 mA maximum
Enclosure	Explosion-proof, Class 1, Div 1, Groups B,C, & D
Sensor	316 stainless steel
Sensor Auto-Test	Hydrogen gas generator integral to gas sensor housing
Control	4 magnetic switches on front of transmitter
Operating Temp.	-40° F to +70° C
Weight	4lbs (1.8 kg)

ACCESSORIES

00-0261 Splash guard/remote calibration adapter for standard sensor

00-0258 Calibration adapter for standard sensor

45-0081 Splash guard for Auto-Test sensor (required for Auto-Test sensor)

ORDERING INFORMATION

Model A12-17 - DDD - E - F

Suffix DDD - Range

Code the measurement range using a 4-digit number. The standard range for a combustible gas system is 0-100% LEL, so the code is normally 0100. However, systems used for hydrogen are sometimes displayed in %, with a range of 0-4 percent (code 0004). If a range other than 0-100% LEL or 0-4% is required, consult factory for availability.

Suffix E - Units of Measurement

3 - %
4 - % LEL

Suffix F - Sensor Style

1 - Sensor without Auto-Test
2 - Sensor with Auto-Test
3 - Remote sensor with junction box
4 - Remote sensor with junction box and Auto-Test



Compatible Alarm System

Need alarm relays or remote display?
Ask for details on ATI's B14 Alarm System.



Visit Us on the Web: www.analyticaltechnology.com

B / A12-17 (8/11)

Analytical Technology, Inc.

6 Iron Bridge Drive
Collegeville, PA 19462

Phone 610.917.0991

Toll-Free 800.959.0299

Fax 610.917.0992

Email sales@analyticaltechnology.com

Analytical Technology

Unit 1 & 2 - Gatehead Business Park
Delph New Road, Delph

Saddleworth OL3 5DE

Phone 01457 873 318

Fax 014557 874 468

Email sales@atiuk.com

Represented by: