

Information Data Sheet

Detector Tube Aromatic Hydrocarbons

Part No. (US): 804132

Part No. D5086811

1. Application

Detection of aromatic hydrocarbons.

2. Detector Tube Sampling Pump

KWIK DRAW (formerly MSA AUER) Gas-Tester[®] IIH, Gas-Tester[®] I / ThumbPump[™]-Sampler, Toximeter[®] II, Uniphos Kwik-Draw[™]-Pump or other suitable detector tubes pumps. Observe respective instructions for use.

3. Measuring Range


25 ppm ... 300 ppm benzene (C₆H₆) at n=4 (4 pump strokes).

5 ppm ... 100 ppm benzene (C₆H₆) at n=10 (10 pump strokes)

4. Chemical Reaction and Color Change

Oxidation of aromatic hydrocarbons by an iodate/ sulfuric acid reagent.

Color change: White → Brown.

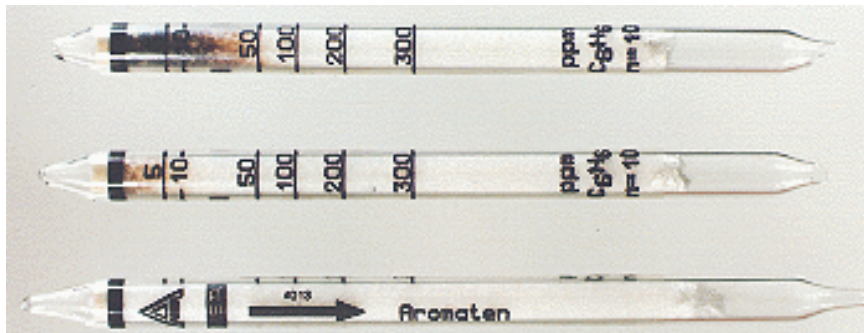

5. Ambient Conditions During Sampling

Detector tubes can be used between 5 °C and 40 °C (41 °F and 104 °F) and up to 80 % RH (40 g/m³ at 40 °C [104 °F]).

6. Interferences and Cross Sensitivities

- No interference from:
 - Hydrogen, methane, ethane, carbon dioxide.
 - propane up to 2 Vol.-%.
- Higher saturated hydrocarbons (e. g. hexanes, octanes), olefinic hydrocarbons (e. g. ethylene), carbon monoxide, hydrogen sulfide will be indicated by a slight brown discoloration.

Manufactured By:

Uniphos Envirotronic Pvt. Ltd (100% EOU)

P.O. Nahuli - 396 108

Tal. Umbergaon,

Dist: Valsad, Gujarat, India

Tel. : +91(260) 2730156 / 57 / 58

Fax : +91(260) 2730160

Marketing Office:

Uniphos Envirotronic Pvt. Ltd

Readymoney Terrace, 167,

Dr. Annie Besant Road, Worli,

Mumbai 400 018, India.

Tel. : +91(22) 6123 3500

Fax : +91(22) 2493 8826

+91 (22) 2497 8119

gasdetection@uniphos-envirotronic.com

www.kwikdrawtubes.com