

Carbon Monoxide 2/a

Catalog No 6733051

Standard Measuring Range: 2 to 60 ppm
Number of Strokes (n): 10
Time for Measurement: about 4 minutes
Standard Deviation: ± 10 to 15%
Color Change: white to brownish pink/green

Ambient Operation Conditions

Temperature: 0 to 50°C
Absolute Humidity: < 2 to 20 mg H₂O/L

Reaction Principle



Cross Sensitivity

Acetylene reacts in the same way as CO, but with a different sensitivity.

Petroleum hydrocarbons, benzene, halogenated hydrocarbons and hydrogen sulfide are retained in the precleans layer. The capacity of the precleans layer may not be sufficient for high concentrations of hydrocarbons and halogenated hydrocarbons. When in question, use a Draeger carbon pretube (CH24101) in front of the CO tube. Practically all gases and vapors that would cause interference with the CO indication (e.g. propane, butane, trichloroethylene, perchloroethylene) are adsorbed by the activated charcoal in the pretube.

Easily cleaved halogenated hydrocarbons (e.g. trichloroethylene), in high concentrations can form chromyl chloride in the precleans layer, which discolors the indicating layer yellowish brown, the carbon pretube can prevent this from happening.


It is impossible to measure CO in the presence of high olefin concentrations.

Extension the the Measuring Range

Using n=2, multiply the reading by 5; the range of measurement is 10 to 300 ppm.

Manufactured by Draeger Safety

Distributed by AFC International, Inc.
PO Box 894
DeMotte, IN 46310
800.952.3293 • 219.987.6825 • fax 219.987.6826
www.afcintl.com • sales@afcintl.com

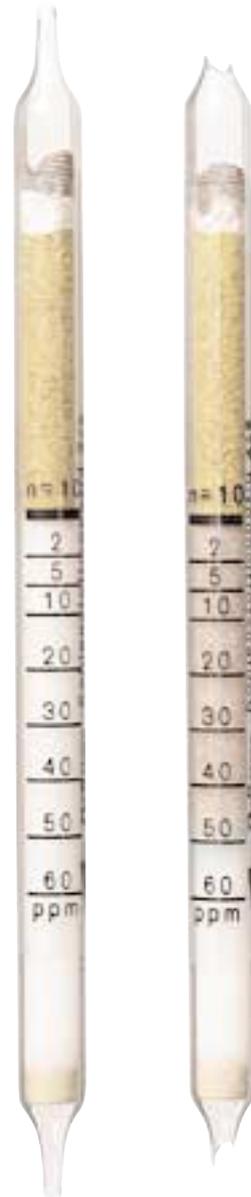

The logo for Draeger, featuring the word "Draeger" in a bold, blue, sans-serif font.