
ChemPro®100i



ChemPro100i

Handheld Chemical Detector

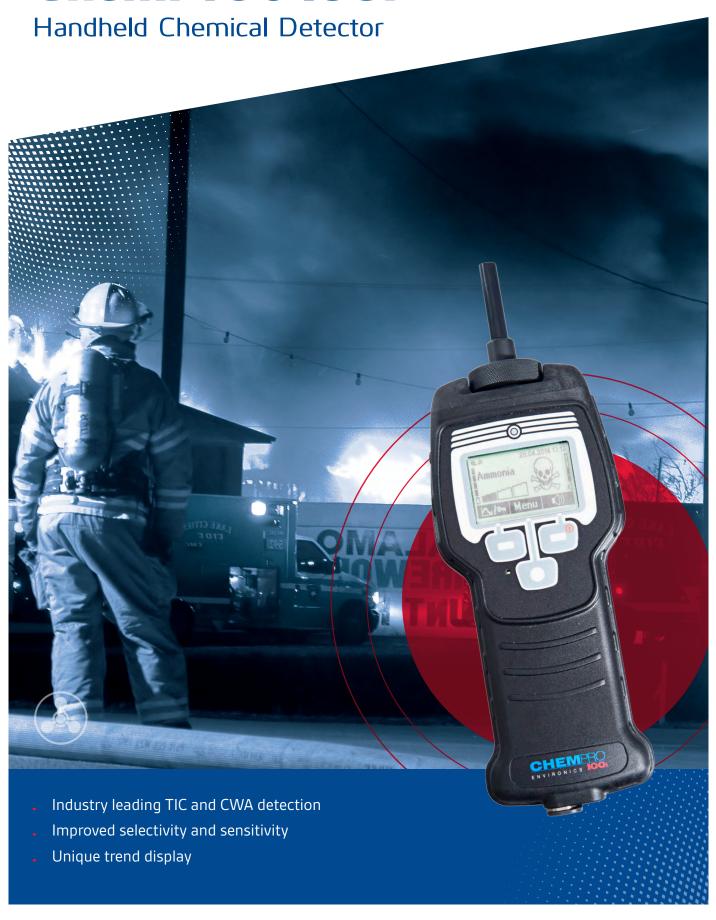

The ChemPro100i is a handheld detector for field detection and classification of Chemical Warfare Agents (CWAs) and selected Toxic Industrial Chemicals (TICs). It provides industry-leading sensitivity and false alarm rejection in the most user friendly and low-maintenance package in its class.

Instead of conventional chemical warfare the defence and security organizations are facing new threat scenarios. Chemical accidents, terrorism or criminal activities are the actual challenges soldiers and first responders have to prepare for on a daily basis. Today's operating environment requires new versatile response tactics incorporating innovative detection equipment.

KEY FEATURES

- . Widest range of detectable chemicals
- Simple maintenance
- Easy to operate
- Versatility (CWA/TIC)
- Minimal false alarm rate
- Radiological and Biological detection with addon modules

APPLICATIONS

- Locating leaks and faulty containers
- Monitoring of industrial sites
- Chemical safety of harbors and railways
- Customs and border control
- Monitoring of mass events and high security meetings
- Law enforcement agencies
- Battlefield detection and monitoring
- CBRN Reconnaissance and surveillance

Multisensor Detection

The ChemPro100i uses an array of detection technologies to detect, classify and measure chemicals enabling simultaneous detection of the widest range of chemicals. The ChemPro100i is a truly orthogonal detector, it's heart remaining the Environics' unique open-loop Ion Mobility Spectrometry (IMS) sensor. The performance is improved with additional sensors that provide a wider range of detectable TICs and improve false alarm rejection.

Lowest Life-Cycle Costs & Logistics

The ChemPro100i, unlike traditional closed-loop IMS, doesn't use consumable sieve packs or dopants. This substantially reduces the cost of ownership as well as the logistics burden when compared to other chemical detectors. With the ChemPro100i you won't be left in the middle of an incident with a CWA/TIC detector that doesn't work.

Easier to Use than a Mobile Phone

The ChemPro100i features an intuitive, graphical user interface with large menu buttons which are easy to use even when wearing protective equipment with heavy gloves. Interchangeable Li-lon batteries can be quickly swapped out with a 6-AA battery pack without the use of any tools.



Add-On Modules

The ChemPro100i capabilities can be easily expanded to a full CBRN detection system by utilizing unique cost effective external add-on modules.

The ChemPro100 Radiation Detection Module enables the ChemPro100i to detect traces of gamma and X-ray radiation. The current dose rate, the accumulated dose reading and alarms are indicated on the display of ChemPro100i.

The ChemPro Reader Module adds new functionality in the form of handheld biological detection. It is intended for reading Envi Assay System lateral flow immunoassay tests. The Reader Module stores the test data for evaluation after the mission.

The ChemPro100 GPS Module displays coordinate information on the ChemPro100i display screen, and includes the coordinates to the alarm memo when chemicals are detected.

The ChemPro100 Earphone Module is designed for covert operations where silence is vital. When connected to ChemPro100i, all audible information is heard through the Earphone.

All add-on modules are plug-and-play compatible with the ChemPro100i and operate using power from the ChemPro100i battery.

ChemPro100i and Accessories

- 1. ChemPro100i Chemical Detector
- 2. Test Tube
- 3. Filter Set (incl. 3 filters)
- 4. Field Monitoring Cap
- 5. Li-ion Battery
- 6. Alkaline Battery Pack
- 7. Mains power Supply
- 8. Carrying Pouch
- 9. Transit Case
- 10. User Manual
- 11. Quick Reference Guide
- 12. Battery Charger
- 13. ChemPro100 GPS Module
- 14. ChemPro100 Earphone
- 15. ChemPro100 Radiation Detector Module
- 16. ChemPro Reader Module
- 17. Environics USB Cable (optional)
- 18. Power/Data Adapter (optional)

ChemPro100i SAK (Standard accessories kit) includes accessories 1-4, 5 or 6 and 7-11.

Accessories 1-16 are included in ChemPro100i CBRN kit

Technical Data

Size Approx. 230 x 101 x 57 mm

(9"L x 4"W x 2"H)

Weight Approx. 880 g (31 oz.) (w/Li-lon battery)

Sensors Orthogonal detection using:

Open-loop (aspirated) IMS cell

• 6 Semiconductor sensors

· Temperature, humidity, pressure and

mass flow sensors

Detection Multiply TIO

Libraries

Multiply TIC & CWA Libraries available

Batterv Easily interchangeable Li-lon

rechargeable and alkaline (6xAA) packs

Operating Hours Approx. 8 hours continuous use on

rechargeable Li-lon

Up to 12 hours continuous use on AA-

batteries

Battery Recharge

Time

Approx. 5 hours using the standard

power supplies

Unit will run and charge simultaneously

Power 110 – 250 VAC, 50 – 60 Hz ChemPro100

Mains Power Supply (standard) 9.5 – 32 VDC ChemPro100 Vehicle

Power Supply (optional)

User interface

Graphical LCD display with white

backlight and 3 operation keys

Sampling 1,3 LPM internal pump with continuous

airflow

Calibration No calibration is required, but a simple

confidence check is recommended before

use

Alarm Modes Audible (adjustable up to 85dB) and

visual alarms

Temperature -30 °C to 55 °C (-22 °F -131 °F) (**Operating**) up to 80 °C (175 °F) temporarily

Temperature (Storage)

Humidity 0-95% non-condensing

Dust & Water Resistance IP67: Dust tight (resists blowing sand MILSTD-810F) and

protected against water

immersion when inlet is closed **Shock & Vibration**High impact composite case

Resistance passes vibration & drop tests

(MIL-STD-810E)

EMI/RFI Highly resistant to electromagnetic & radio

interference and doesn't generate electromagnetic

interference

Other Features RS-232 / USB communication

port

User adjustable data logging. Optional User Interface Program needed for downloading the data to a

computer.

Warranty 1-year standard warranty

2, 3, 4 and 5 year warranties

available

Optional Accessories

Radiation Detector Module

Size Approx. 103 x 74 x 43 mm

Weight Approx. 150g

Detected Radiation Gamma and X-ray radiation

Dose RateFrom 50 keV to 1.3 MeVMeasurement Range0.04 μSv/h to 100 mSv/h

Response Time Fast mode 2,5 seconds

Normal mode 3 min. at ambient

radiation levels

ChemPro Reader Module

Size Approx. 120 x 55 x 60 mm

Weight Approx. 245g
Memory 100 test results

Reading modes Read test results: 10 sec.

response time

Run test: 15 min. response time







Environics Oy

-40°C to 71 °C (-40 °F -160 °F)

P.O. Box 349 FI-50101 Mikkeli FINLAND tel. +358 201 430 430 fax. +358 201 430 440 sales@environics.fi www.environics.fi

Representative in the USA: GASES101 LLC

1107 Wonder Dr. Ste. 103 Round Rock, TX 78681 USA tel. 512-436-8923 fax. 877-344-2739 sales@gases101.com www.gases101.com



Subscribe to our Newsletter