



SEC 3100 DIN Digital Gas Transmitter

Features

- DIN rail mount
- Back lighted LCD Display
- Low Cost
- Plug and play toxic, oxygen and combustible gas sensors
- Self-check system
- 4-20 mA output
- RS-485 Interface (Isolated)
- Optional alarm and fault relays
- Pushbutton programming
- Non-intrusive calibration
- Removable, non-volatile, time stamped data logging
- Digital communication link to SEC 3000 and SEC Millenium Gas Detectors

Applications

- Petrochemical Refineries
- Compost Facilities
- Semi-Conductor Industry
- Mining
- Pulp and Paper Mills
- Oil Rig Platforms
- Buildings
- Automotive Industry
- Engine Test Rooms
- LNG & LPG Facilities
- Sewage Industry
- Water Treatment Plants
- Parking Garages
- Chemical Industry
- Nuclear Industry
- Fertilizer Industry
- Tunnels
- Medical Facilities

Operation

The SEC3100 provides interface capabilities for the SEC3000 Gas Detector and SEC Millenium Infrared Gas Detectors.

The SEC3100 features:

- Back lighted LCD for Gas Level/Unit Parameter display
- Four (4) configurable Alarm/Fault Relays
- An isolated RS485 Modbus interface provides reliable communication in noisy environments and eliminates "Ground Loop" problems.
- Three pushbutton switches for local configuration and calibration
- Time stamped Data logging using a removable non-volatile memory module. Module can be removed from the unit to allow remote data downloading and data archiving.

SPECIFICATIONS**Detection Method**

Toxic Gases – Electrochemical
Combustible - Infrared

Gas Sensor Compatibility

SEC 3000 & SEC Millenium

Output (digital)

RS-485 LAN (Isolated)

Output (analog)

4-20 mA (source type), max. 1000 ohm load
at 24 VDC supply voltage

Output (optional relays)

(3) Alarm and (1) Fault

Display

Back Lighted LCD
LEDs for relay indication

Operating Voltage

18-32 VDC

Operating Current (No Sensor)

125mA Max @ 24VDC

Power Consumption (SEC3100 & Sensor)

Toxic Gases and oxygen (SEC 3000) – 4W Max
Combustible & CO₂ (SEC Millenium) – 9W Max

Temperature Rating

-40° to + 70°C

Humidity

0-99% RH (Non-condensing)

RFI

Built in filters reject RFI/EMI

Housing Construction

ABS Plastic (Enclosure color gray)

Certification

CSA/NRTL Pending

Housing Dimensions

3.54 (W) x 4.17 (L) x 2.28 (H) inches
{90 (W) x 106 (L) x 58 (H) mm}


Weight

Approximately 2 lbs. {0.9 Kg.}

Partial Gas List

Oxygen	(O ₂)	Carbon Monoxide	(CO)
Hydrogen	(H ₂)	Germane	(GeH ₄)
Ammonia	(NH ₃)	Silane	(SiH ₄)
Nitric Oxide	(NO)	Phosphine	(PH ₃)
Bromine	(Br ₂)	Sulfur Dioxide	(SO ₂)
Fluorine	(F ₂)	Nitrogen Dioxide	(NO ₂)
Arsine	(AsH ₃)	Chlorine Dioxide	(ClO ₂)
Ozone	(O ₃)	Hydrogen Sulfide	(H ₂ S)
Chlorine	(Cl ₂)	Hydrogen Fluoride	(HF)
Phosgene	(COCl ₂)	Hydrogen Chloride	(HCl)
Diborane	(B ₂ H ₆)	Hydrogen Cyanide	(HCN)
Formaldehyde	(HCHO)	Hydrogen Selenide	(H ₂ Se)
Ethylene Oxide	(ETO)	Hydrogen Peroxide	(H ₂ O ₂)
Combustible	(HC)	Carbon Dioxide	(CO ₂)

Current Output	Status
0.0 mA	Unit Fault
0.8 mA	Unit warm up
1.2 mA	Zero drift fault
1.6 mA	Calibration fault
2.0 mA	Unit spanning
2.2 mA	Unit zeroing
4-20 mA	Normal measuring mode
4.0 mA	Zero gas level
5.6 mA	10% Full Scale
8.0 mA	25% Full Scale
12 mA	50% Full Scale
16 mA	75% Full Scale
20 mA	Full scale
>20 mA	Over-range

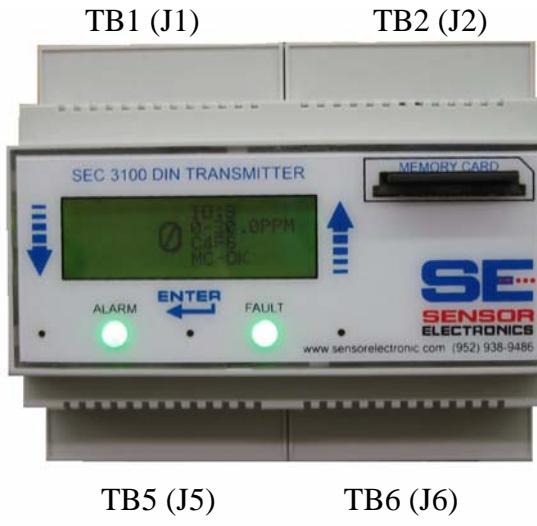

Sensor Electronics Corporation

Distributed by: AFC International, Inc.

PO Box 894 • DeMotte, IN 46310 • 219.987.6825 • 800.952.3293 • fax 219.987.6826 • www.afcintl.com • sales@afcintl.com