

Product leaflet

Product
Protective hood

Model No.
SR 345

Ordering No.
H09-1021

Product Description

The protective hood is designed for use together with the SR 90-2 / SR 90-3 half mask (APR), the SR 100 half mask (APR) and the SR 200 full face mask (APR) with filters and/or cartridges or SR 307 compressed air attachment Supplied Air Respirator (SAR). The hood is made of chemicals-resistant materials and provides protection against splashing and dripping of most solvents and acids in relatively low concentrations. However, the material may be affected by extended contact with certain solvents in liquid form.


The hood is extra roomy, so that both a safety helmet and ear protectors can be worn under the hood, if necessary. The SR 345 hood extends over the user's shoulders, back and chest. The visor is treated to prevent misting. The hood can be machine-washed about 10 times – without spin-drying – at a maximum of +40 °C.

Technical specification

SR 345

Service temperature	14 to 131 °F (-10 to +55 °C), < 90 % RH
Storage temperature	4 to 104 °F (-20 to +40 °C), < 90 % RH
Weight SR 345	≈ 7.1 oz (200 g)
Resistance to chemicals	Requisition list from Sundström Safety Inc

- A. Hood**
- B. Visor**
- C. Half mask**
- D. Filter combination**
- E. Exhalation valve (two)**

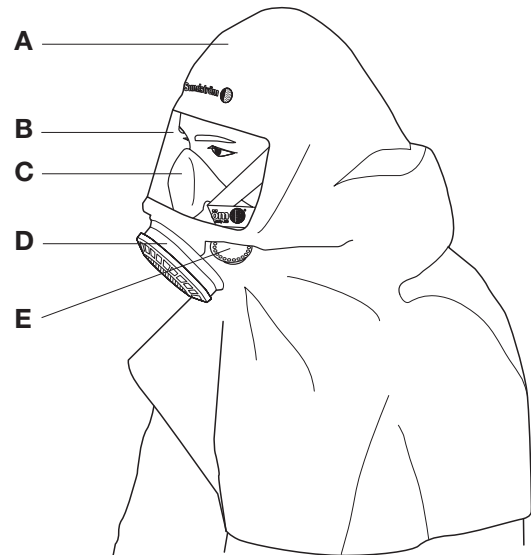

SR 345

Öäcã c'áÁ^ˆ
 ÖÖÁQc'í} æã } æÁQ&
 ÚUÁÓ[c'Á JI ÁÁO^T [c'ÁÁÍHF€
 ì €ÈÌ GÈGHÁÁG FJÈÌ Ì ÈÌ G
 æÁG FJÈÌ Ì ÈÌ G
 • æ^•O æ&ã dÈ [ÁÁ , , Èæ&ã dÈ [}

Sundstrom Safety Inc.
 20 North Blossom St.
 East Providence, RI 02914
 Office: 1-401-434-7300
 Toll Free: 1-877-SUNDSTROM
 Fax: 1-401-434-8300
 info@srsafety.com
 www.srsafety.com

Sundström 
 www.srsafety.com