

Information Data Sheet

Detector Tube **Tri-5**

Part No. (US): **487343**

Part No. **D5085842**

1. Application

Detection of trichloroethylene (C₂HCl₃) in air or in technical gases.

2. Detector Tube Sampling Pump

KWIK DRAW (formerly MSA AUER) Gas-Tester® IIH, Gas-Tester® I / ThumbPump™-Sampler, Toximeter® II, Uniphos Kwik-Draw™-Pump or other suitable detector tubes pumps. Observe respective instructions for use.

3. Measuring Range


20 ppm ... 250 ppm trichloroethylene at n = 1 (1 pump stroke).

5 ppm ... 60 ppm trichloroethylene at n = 3 (3 pump strokes).

4. Chemical Reaction and Color Change

Oxidative decomposition of halogenated hydrocarbons in the conversion layer by a chromate/sulfuric acid reagent, forming chlorine or bromine. Oxidation of an aromatic amine by chlorine resp. bromine in the indicating layer.

Color change: White → Orange

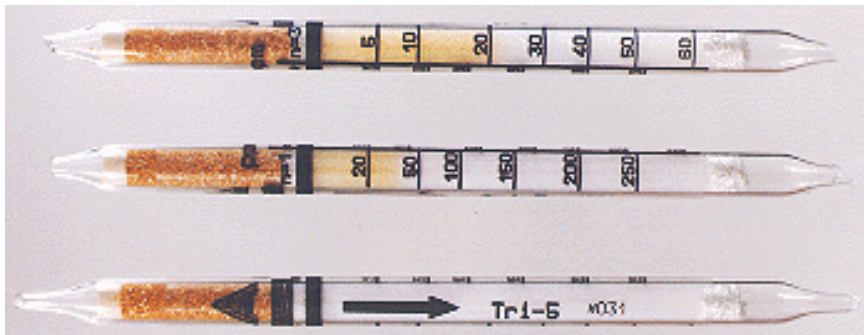

5. Ambient Conditions During Sampling

Detector tubes can be used without compensation of the reading between 5 °C and 35 °C (40 °F and 95 °F) and between 10% rh [0.7 g/m³ at 5 °C (40 °F)] and 90% rh [36 g/m³ at 35 °C (95 °F)].

6. Interferences and Cross Sensitivities

a) No interference from:

– hydrogen, methane, ethane, carbon monoxide, carbon dioxide.

– propane, butanes, chloromethane, dichloromethane, carbon tetrachloride, bromomethane, fluorinated methanes, fluorinated ethanes up to 1 vol% (n = 1) or 3000 ppm (n = 3).

b) Easily oxidizable halogenated hydrocarbons (e.g. vinyl chloride, dichloroethylenes, perchloroethylene), halogens (chlorine, bromine), hydrogen chloride, phosgene, nitric oxide, nitrogen dioxide will be indicated.

The sensitivity of indication varies.

c) In the presence of oxidizable gases and vapours (e.g. hydrocarbons, hydrogen sulfide) part of the conversion layer will be consumed. Trichloroethylene indication may be lower than actually present. High concentrations of oxidizable accompanying substances discolour conversion layer from brown to greenish. Do not use detector tube in this case.

Manufactured By:

Uniphos Envirotronic Pvt. Ltd (100% EOU)

P.O. Nahuli - 396 108

Tal. Umbergaon,

Dist: Valsad, Gujarat, India

Tel. : +91(260) 2730156 / 57 / 58

Fax : +91(260) 2730160

gasdetection@uniphos-envirotronic.com

Marketing Office:

Uniphos Envirotronic Pvt. Ltd

Readymoney Terrace, 167,

Dr. Annie Besant Road, Worli,

Mumbai 400 018, India.

Tel. : +91(22) 6123 3500

Fax : +91(22) 2493 8826/+91 (22) 2497 8119

www.kwikdrawtubes.com

Manufactured By:
Uniphos Envirotronic Pvt. Ltd (100% EOU)
P.O. Nahuli - 396 108
Tal. Umbergaon,
Dist: Valsad, Gujarat, India
Tel. : +91(260) 2730156 / 57 / 58
Fax : +91(260) 2730160
gasdetection@uniphos-envirotronic.com

Marketing Office:
Uniphos Envirotronic Pvt. Ltd
Readymoney Terrace, 167,
Dr. Annie Besant Road, Worli,
Mumbai 400 018, India.
Tel. : +91(22) 6123 3500
Fax : +91(22) 2493 8826/+91 (22) 2497 8119
www.kwikdrawtubes.com

Rev.02/Jan17